



FilmTec™ BW30 PRO-400/34i

High Rejection and High Performance Industry-Standard Brackish Water Reverse Osmosis Membrane Element

Key Features

- Delivers consistent water quality and higher rejection and flow than previous generation BW30 product
- Based on historical BW30 Industry-standard RO membrane with decades of proven performance
- Excellent durability resulting in stable, long-term performance
- Enhanced fouling protection thanks to 34 mil feed spacer
- Includes iLEC™ interlocking end caps, reducing system operating costs and the risk of o-ring leaks that can cause poor water quality

Key Applications


- Demineralization for industrial applications, such as: Power Generation, Steel & Metal, Chemical & Petrochemical
- Municipal water purification

Typical Properties

| FilmTec™ Element | Active Area ft ² (m ²) | Feed Spacer Thickness (mil) | Permeate Flow Rate gpd (m ³ /d) | Stabilized Salt Rejection (%) | Minimum Salt Rejection (%) |
|------------------|--|--------------------------------|---|----------------------------------|-------------------------------|
| BW30 PRO-400/34i | 400 (37) | 34 | 11,000 (42) | 99.6 | 99.4 |

1. Permeate flow and salt rejection based on the following standard conditions: 2,000 ppm NaCl, 225 psi (15.5 bar), 77°F (25°C), pH 8 and 15% recovery.
2. Flow rates for individual elements may vary but will be no more than 15% below the value shown.
3. Sales specifications may vary as design revisions take place.

Element Dimensions

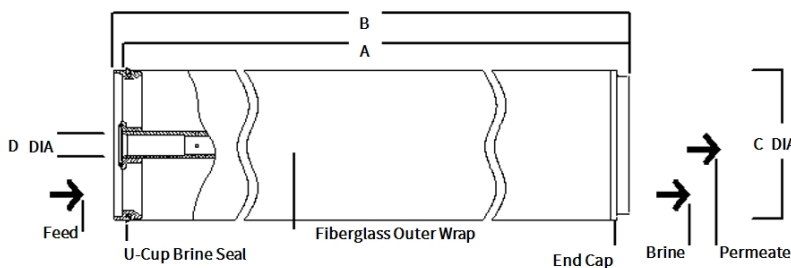

| FilmTec™ Element BW30 PRO-400/34i Dimensions - inches (mm) | |
|---|---------------|
| A | 40.0 (1,016) |
| B | 40.5 (1,029) |
| C | 7.9 (201) |
| D | 1.125 ID (29) |

1. For element weight information refer to [What is the weight of FilmTec™ elements as delivered?](#)
2. For element packaging and shipping information refer to [How are FilmTec™ elements packaged and shipped?](#)
3. Individual elements with iLEC™ Interlocking Endcaps measure 40.5 inches (1,029 mm) in length (B). The net length (A) of the elements when connected is 40.0 inches (1,016 mm).

Suggested Operating Conditions

| | |
|--|--------------------------------|
| Membrane Type | Polyamide Thin-Film Composite |
| Maximum Operating Temperature ¹ | 113°F (45°C) |
| Maximum Operating Pressure | 600 psig (41 bar) |
| Maximum Pressure Drop | |
| Per Element | 15 psig (1.0 bar) |
| Per Pressure Vessel (Minimum 4 Elements) | 50 psig (3.5 bar) |
| pH Range | |
| Continuous Operation ¹ | 2 - 11 |
| Short-Term Cleaning (30 min.) ² | 1 - 13 |
| Maximum Feed Flow ³ | 75 gpm (17 m ³ /hr) |
| Maximum Feed Silt Density Index | SDI 5 |
| Free Chlorine Tolerance ⁴ | < 0.1 ppm |

1. Maximum temperature for continuous operation above pH 10 is 95°F (35°C).
2. Refer to [FilmTec™ Cleaning Guidelines](#) (Form No. 45-D01696-en).
3. For recommended feed and permeate flow rates, flux, and recovery for various feed sources, refer to [FilmTec™ Design Guidelines for multiple-element systems of 8-inch elements](#) (Form No. 45-D01695-en).
4. Oxidation damage is not covered under warranty, DuPont recommends removing residual free chlorine by pretreatment prior to membrane exposure. Please refer to [Dechlorinating Feedwater](#) (Form No. 45-D01569-en) for more information.

General Information

- Keep elements moist at all times after initial wetting.
- For successful operation of Reverse Osmosis (RO) and Nanofiltration (NF) membrane systems, the operation must follow the guidelines provided in the [FilmTec™ Reverse Osmosis / Nanofiltration Elements Operation Excellence and Limiting Conditions Tech Fact](#) (Form No. 45-D04388-en).
- To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution.
- The customer is fully responsible for the effects of incompatible chemicals and lubricants on elements.
- Avoid static permeate-side backpressure at all times.
- Permeate obtained from the first hour of operation should be discarded.
- The use of this product in and of itself does not necessarily guarantee the removal of cysts and pathogens from water. Effective cyst and pathogen reduction is dependent on the complete system design and on the operation and maintenance of the system.

Important Information

Please consider good operating practices for the optimal performance of the Reverse Osmosis membrane elements to assure damage free operation:

1. [Loading of Pressure Vessels - Preparation & Element Loading](#) (Form No. 45-D01602-en)
2. System Operation, including plant [Start-Up Sequence](#) (Form No. 45-D01609-en) and [RO & NF Systems Shutdown](#) (Form No. 45-D01613-en)
3. [Handling, Preservation, and Storage](#) (Form No. 45-D03716-en)

Full information of plant design, system operation and troubleshooting is given in the [FilmTec™ Reverse Osmosis Membranes Technical Manual](#) (Form No. 45-D01504-en).

Regulatory Note

This product may be subject to drinking water application restrictions in some countries; please check the application status before use and sale.

